




SCHEMATIC






PCB LAYOUT

RoHS Compliance

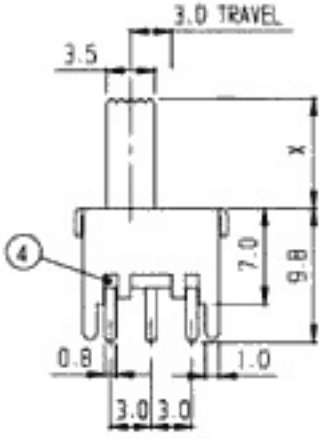

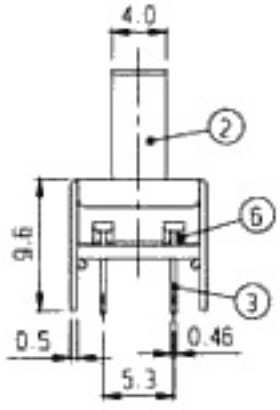

NO	PART	MATERIAL	QTY	REMARKS
7	SPRING	STEEL WIRE	1	
5	BALL	STEEL	1	
3	TERMINAL	BRASS	6	Ag PLATED
1	FRAME	S P C C	1	Ni PLATED

NO	PART	MATERIAL	QTY	REMARKS
6	CONTACT	P B S	2	Ag PLATED
4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
2	KNOB	P O M	1	EG 4-11

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH (2P2T)			
	RATING: DC 30V 0.3A	MODEL NO: SS-22F05 (EG)			
	CONTACT RESISTANCE: 30mΩ max.				
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01		
	SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	