

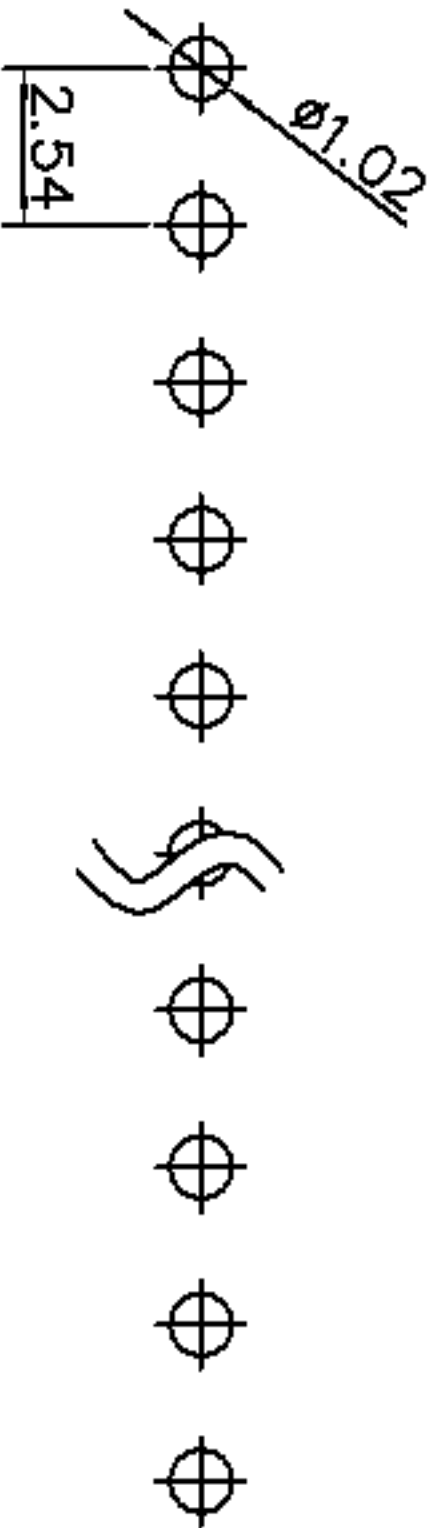


	A			
		新版图	/	2012.05.23

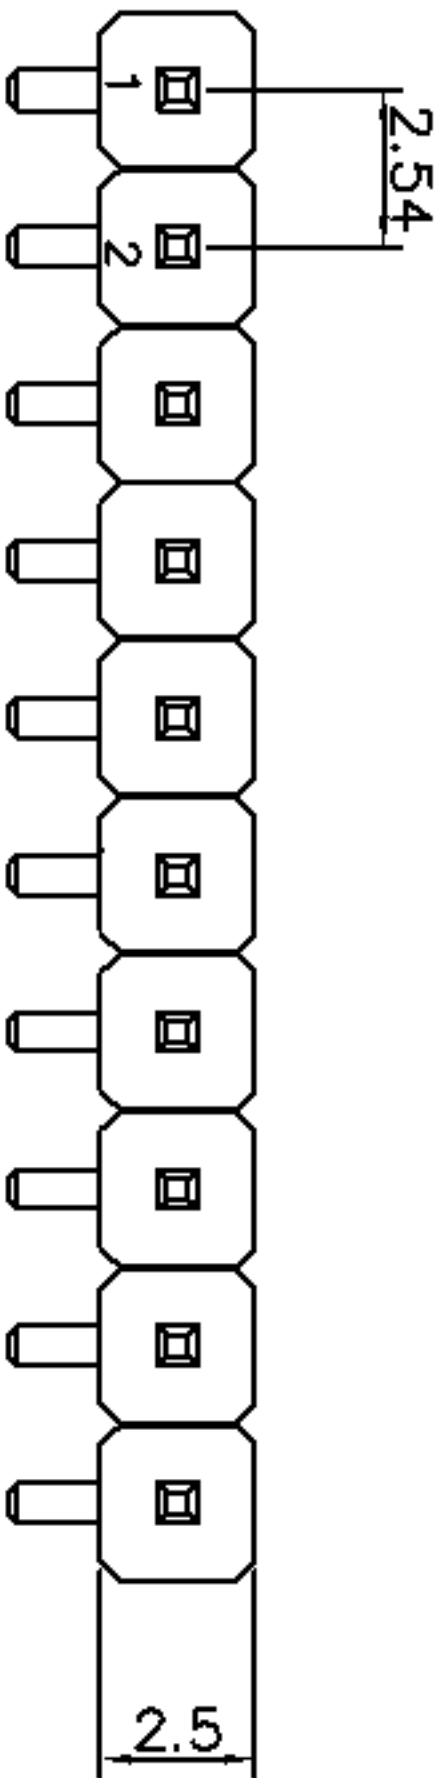


PCB Layout

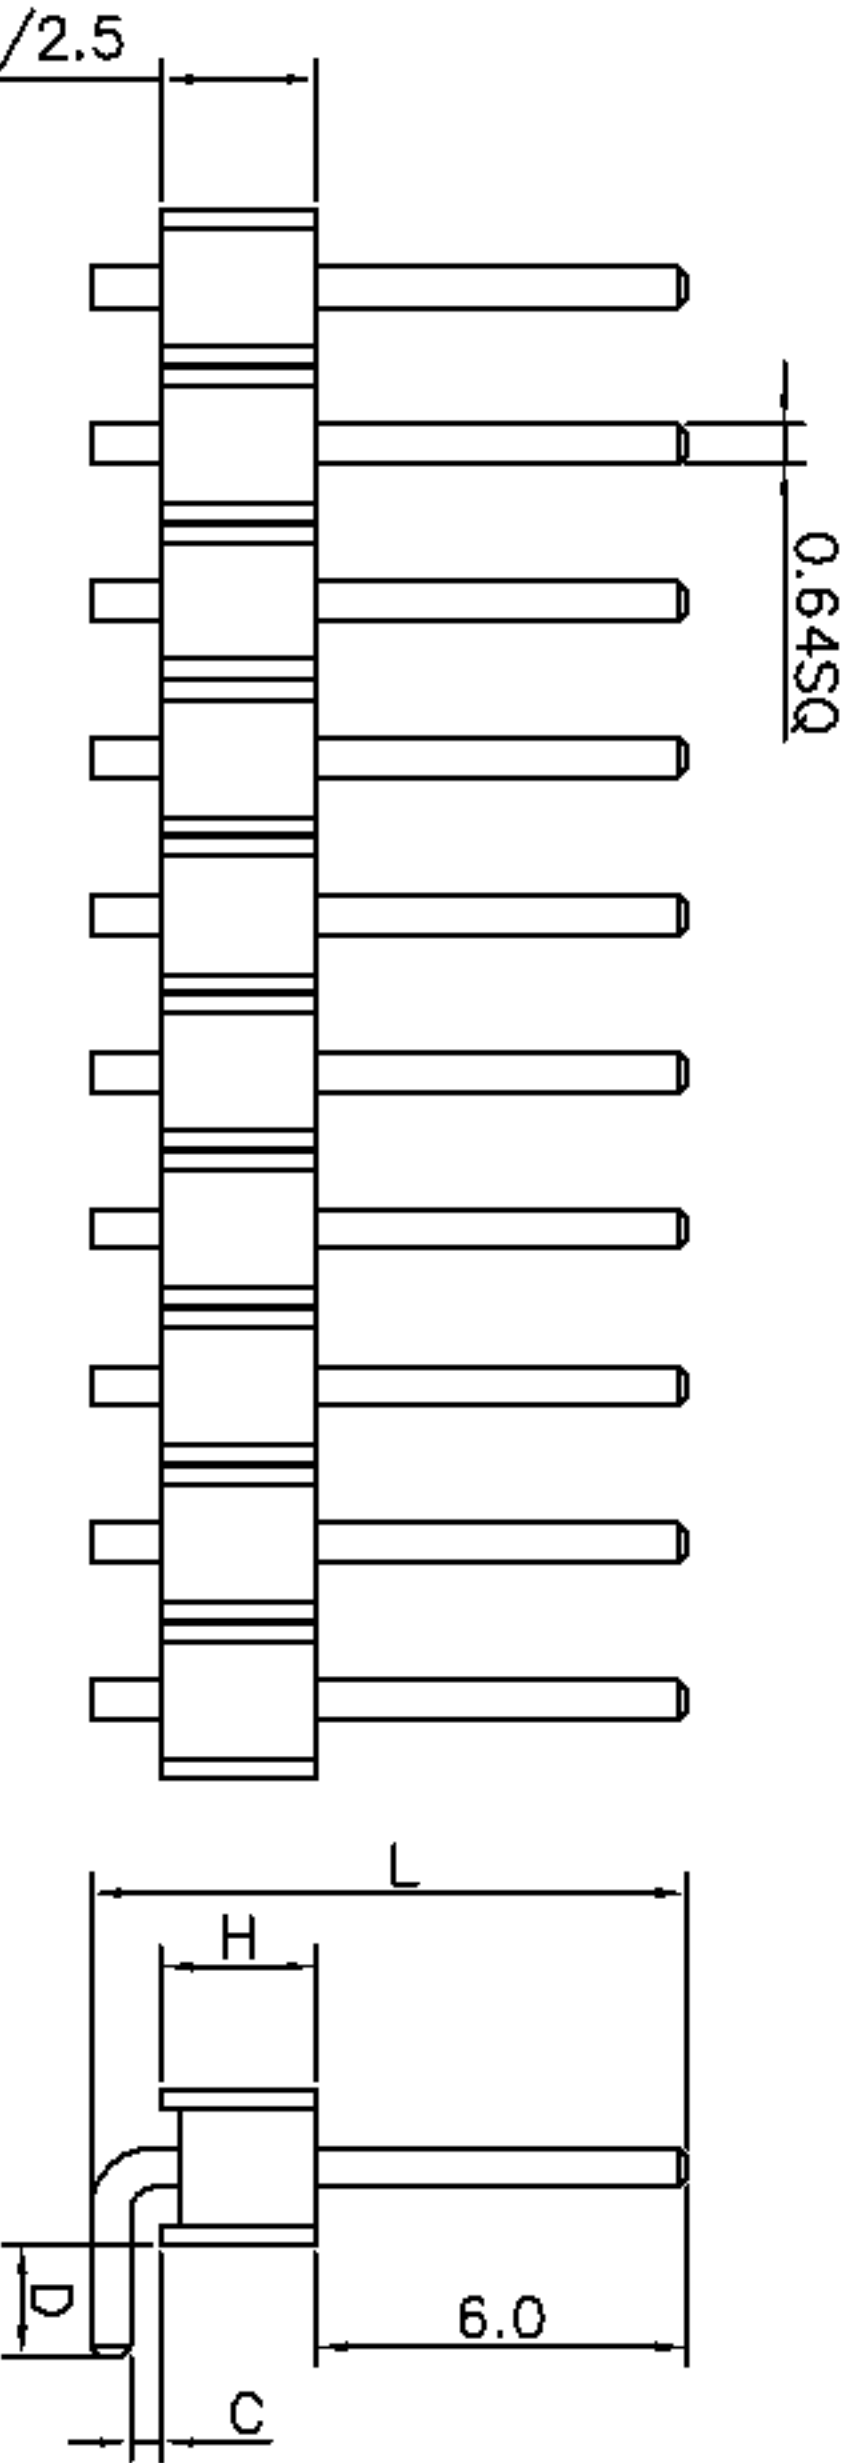

H、L、C、D的尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material:Brass
Insulator Material:PBT+30%GF
Electrical:
Current rating:3Amps/Contact max.
Contact resistance:<=20mohms/Contact
Insulation resistance:>=1000Mohms at V=100V
Withstanding Voltage:550V AC/Minute
Mechanical:
Operating Temperature:Gold plated :-55° C~105° C
Tin plated :-40° C~105° C
Soldering Temperature:260° C 10s Max.

1.0/1.5/1.7/2.0/2.5

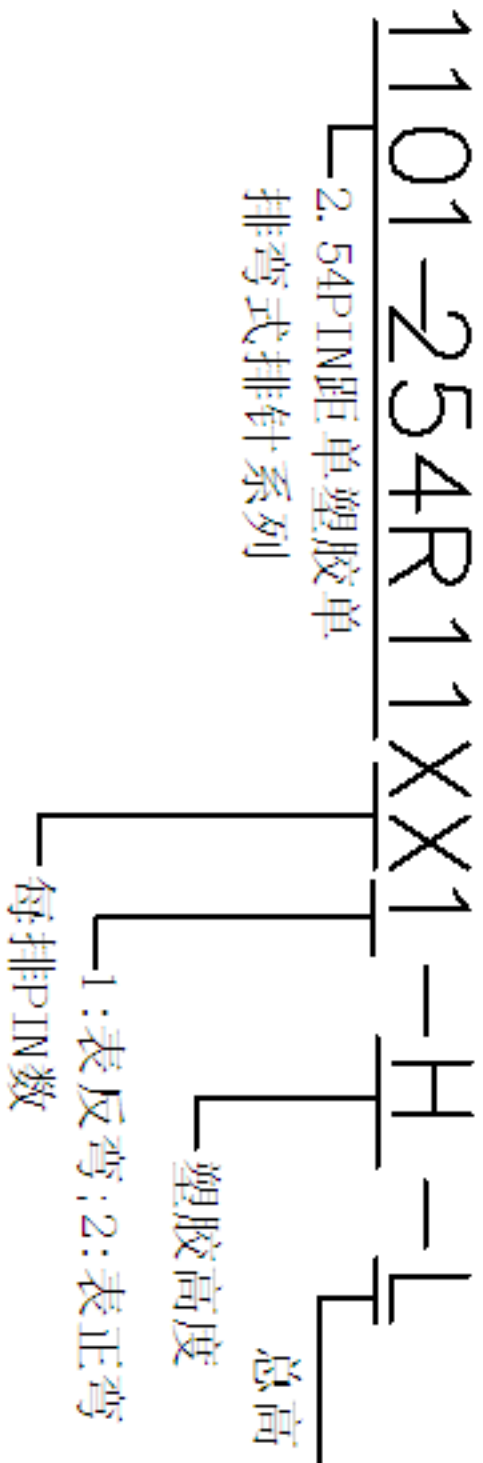

TOLERANCE			DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHEN ELECTRONIC CO., LTD
			YSH	2012. 05. 23	
CHECKED			DATE		TITLE: 排针系列-2. 54 PIN距-单排-单塑 胶 反弯
CLIENT APPROVED			DATE		
RFQ NO					
CLIENT P/N			1101-254R11XX2-XX		
UNIT: mm			SCALE: free		
FILE NO.:			YH20120528002		

TOLERANCE		
TOL ON		ANGLE
.XXX =	0.05	
.XX =	0.15	1°
.X =	0.20	2°
X. =	0.30	