



	A	新版图	/	2012.05.23
				L2M

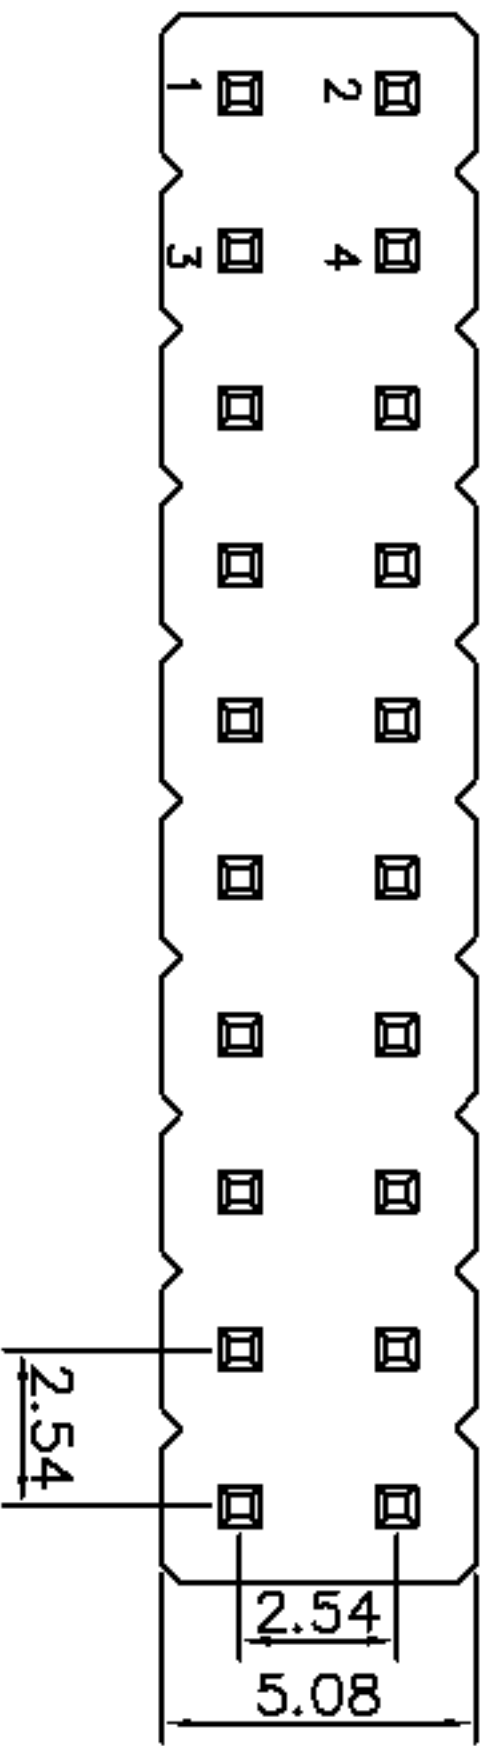

0.64SQ

2.54



2.54
5.08

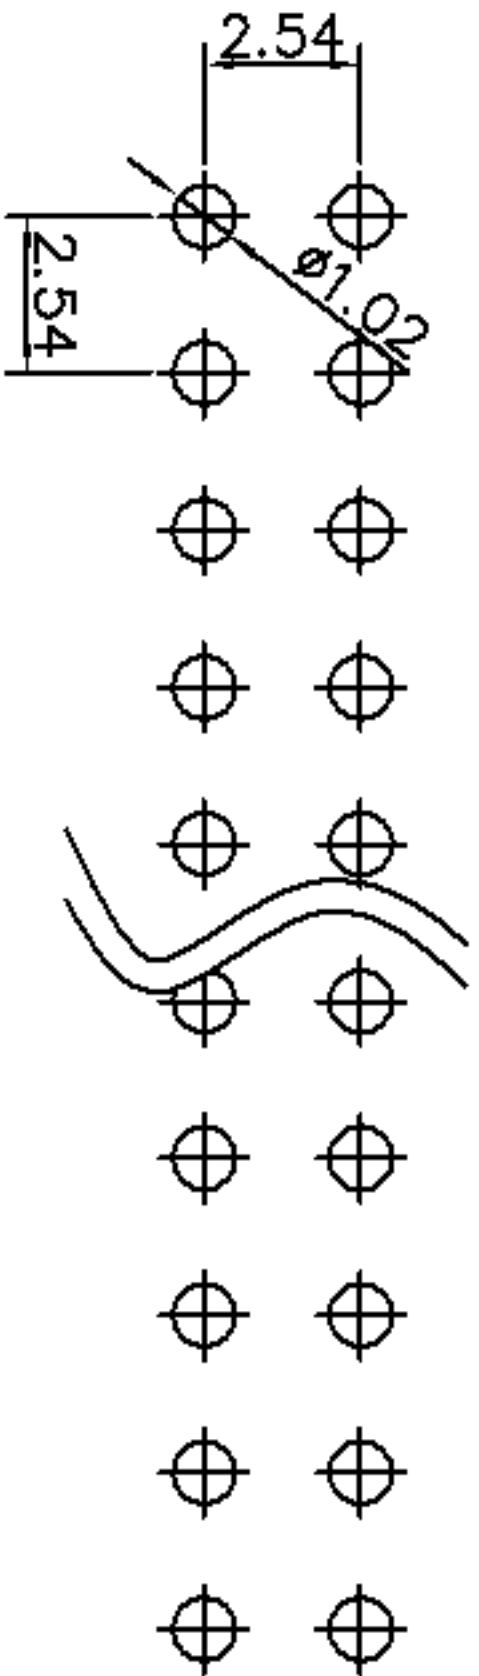

PCB Layout

Technical Data:

Material:
Contact Material:Brass
Insulator Material:PBT+30%GF
Electrical:
Current rating:3Amps/Contact max.
Contact resistance:<=20mohms/Contact
Insulation resistance:>=1000Mohms at V=100V
Withstanding Voltage:550V AC/Minute
Mechanical:
Operating Temperature:Gold plated :-55° C~105° C
Tin plated :-40° C~105° C
Soldering Temperature:260° C 10s Max.

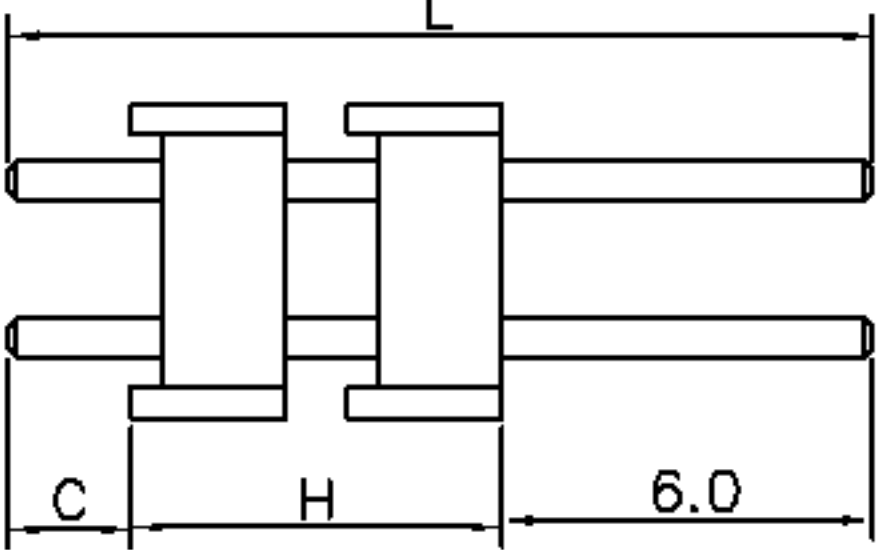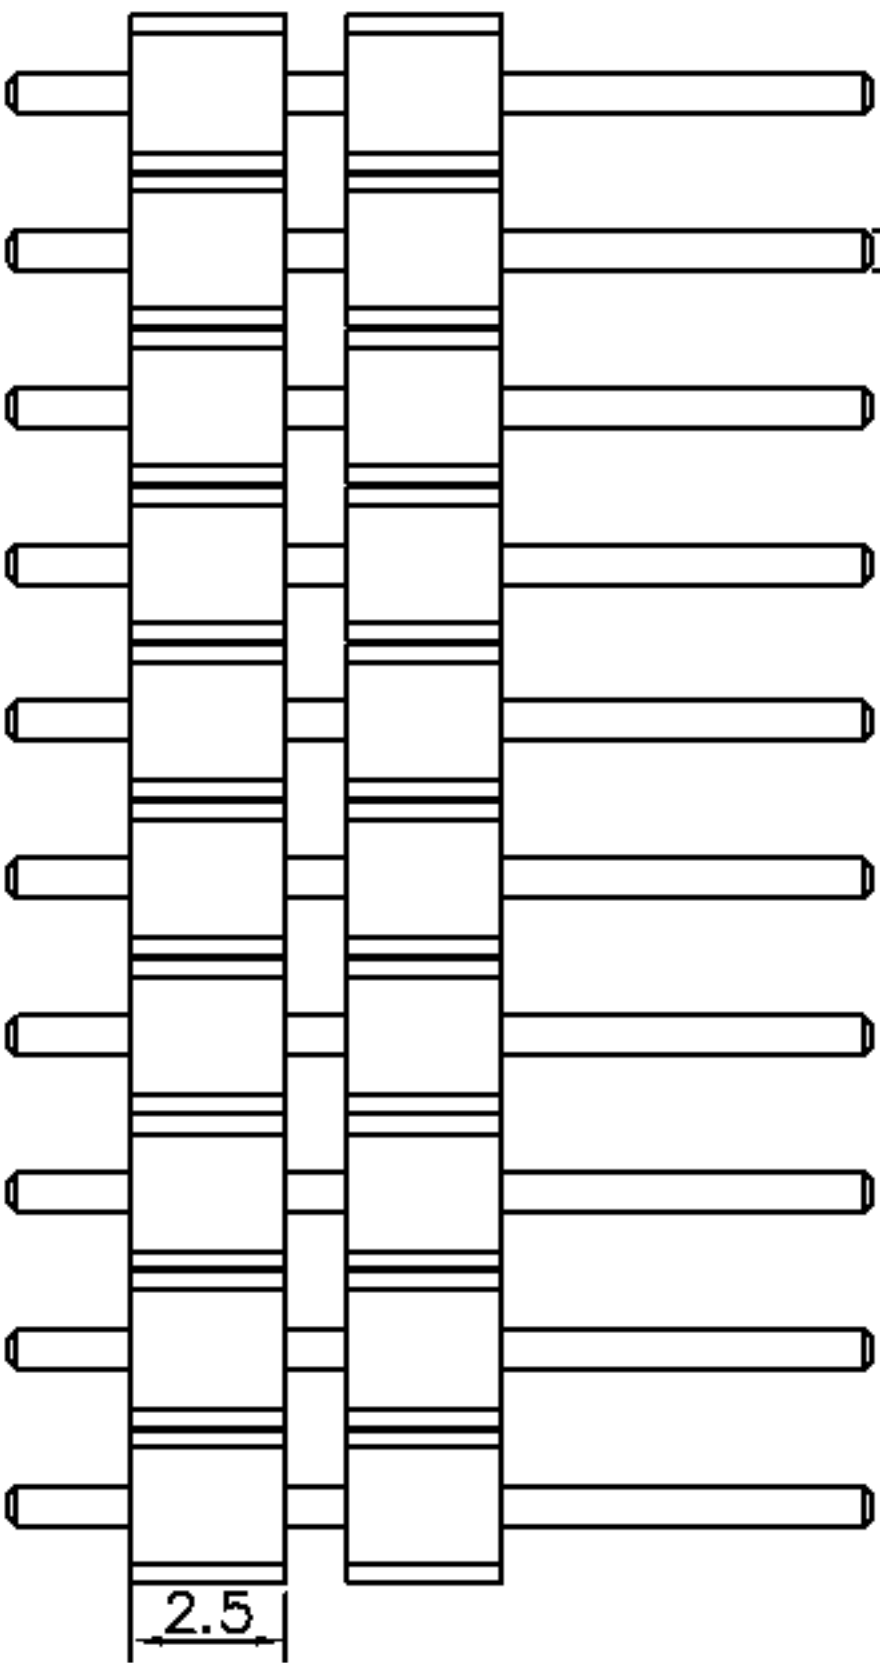

H、L、C的尺寸
可依客户要求订做

1101-254S22XX-H-L

2.54PIN距双塑胶双

排直式排针系列

每排PIN数

塑高

总高

TOLERANCE		DRAWN		DATE		 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
TOL	ON	ANGLE	YSH	2012.05.23		
.XXX =	0.05					TITLE: 排针系列-2.54 PIN距-双排-双塑胶直针
.XX =	0.15	1°	CLIENT APPROVED	DATE	RFQ NO	
.X =	0.20	2°			CLIENT P/N	
X. =	0.30				UNIT : mm	
					SCALE: free	
					FILE NO. : YH20120525013	