


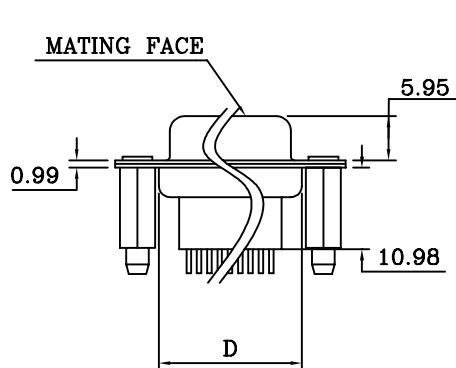

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FINISHED
RIVETED INSERT : BRASS MATERIAL , NICKEL FINISHED
WITH #4-40 THREADED RIVETED CLINCH NUTS

CONTACT CURRENT RATING : 5.0 AMPS
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C
CONTACT RESISTANCE : 30 MILLIOHMS MAX.

XX=No. of Contacts

- Options
- 00: With 0.120" Diameter Holes
- 01: With #4-40 Threaded Rivets
Clinch Nuts on Back Shell
- 03: With #4-40 Threaded Rivets
Boardlocks(Height=9.6mm)
- 04: With #4-40 Threaded Rivets
Boardlocks(Height=11.0mm)
- 10: With #4-40 Threaded Rivets
Clinch Nuts on Front Shell
- 13: With #4-40 Threaded Rivets
Boardlocks(Height=9.6mm) &
Jack Screws Assembled
- 14: With #4-40 Threaded Rivets
Boardlocks(Height=11.0mm) &
Jack Screws Assembled
- Insulator
- 0: Black
- 1: White

XX	A ± 0.25	B ± 0.13	C ± 0.38	D ± 0.25	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

				Drawn by	ZengRenJun	2005.05.18
				Designed by	ZengRenJun	2005.05.18
				Approved by	ZhiFu Lin	2005.05.18
					TOLERANCE	Code: 0
A0	Drawing	Zhenxing FU	2004.06.24	Units:mm(inches)	.XX ±0.13	Scale 1:1
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+\\-2°

D-Sub Straight, High Profile,
Machine Pin

Ver A0	Part No. 1156-0XX-200-004
--------	---------------------------